

ASSEMBLY INSTRUCTIONS

Bryant Extra Large Two Tier Chandelier

Item # TOB5197

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.


TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver Wire Strippers
Wire Cutters

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove mounting plate **(B)** from canopy **(E)** by removing collar ring **(F)**.
3. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.
4. Thread rod **(I)** to fixture body **(J)**.
5. Feed fixture wires through rod **(H)**, then connect to rod **(I)** and secure with coupling **(P1)**. Repeat for rod **(M)**, connecting to coupling **(P1)** and secure with coupling **(P2)**.
6. Continue feeding wires through collar ring **(F)**, canopy **(E)** and top rod **(G)**.
7. Holding fixture upright, slide collar ring **(F)**, canopy **(E)** down rods and rest on top of rod **(I)**. Then connect rod **(G)** to coupling **(P2)**.

NOTE: Slide components down slowly to avoid damage.

8. Hang fixture swivel ball **(D)** to the center of mounting plate **(B)**.
9. Cut excess wires, being sure to leave enough to reach the junction box. Separate wires and strip insulation on each 5/8".

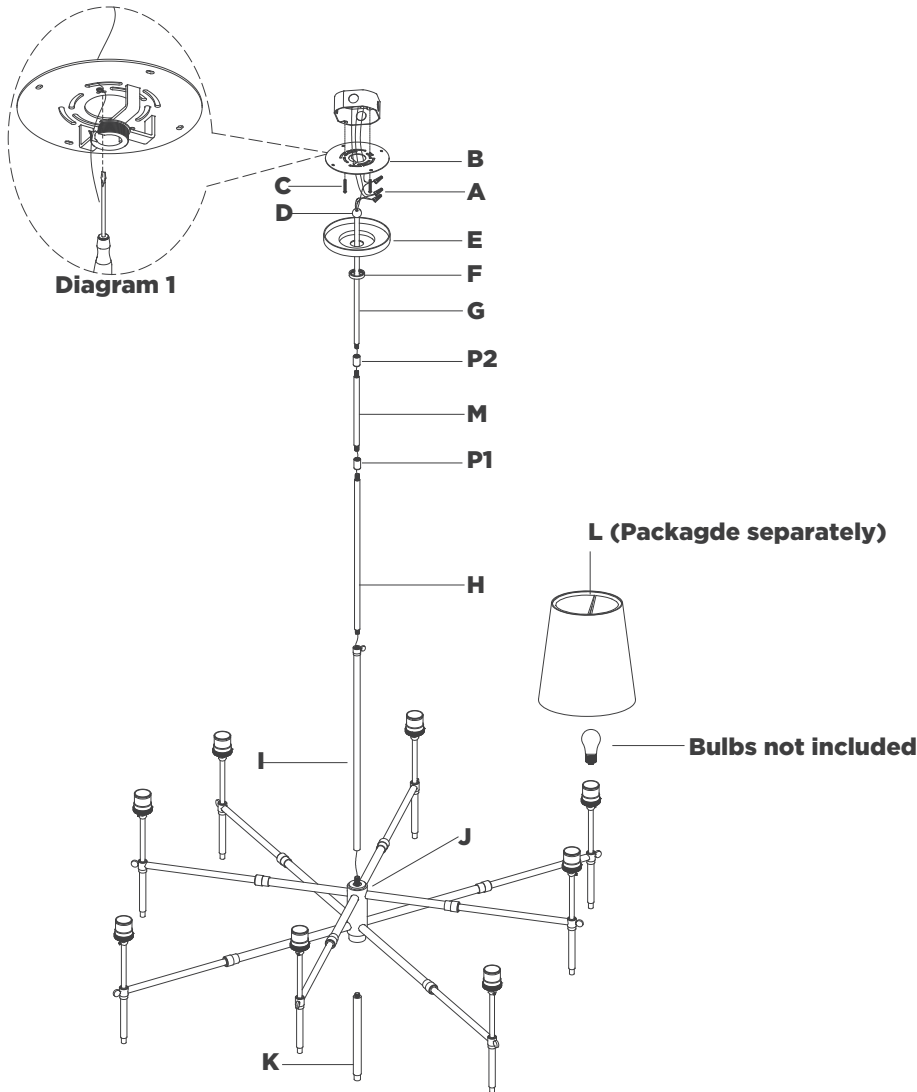


ASSEMBLY INSTRUCTIONS

Bryant Extra Large Two Tier Chandelier

Item # TOB5197

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

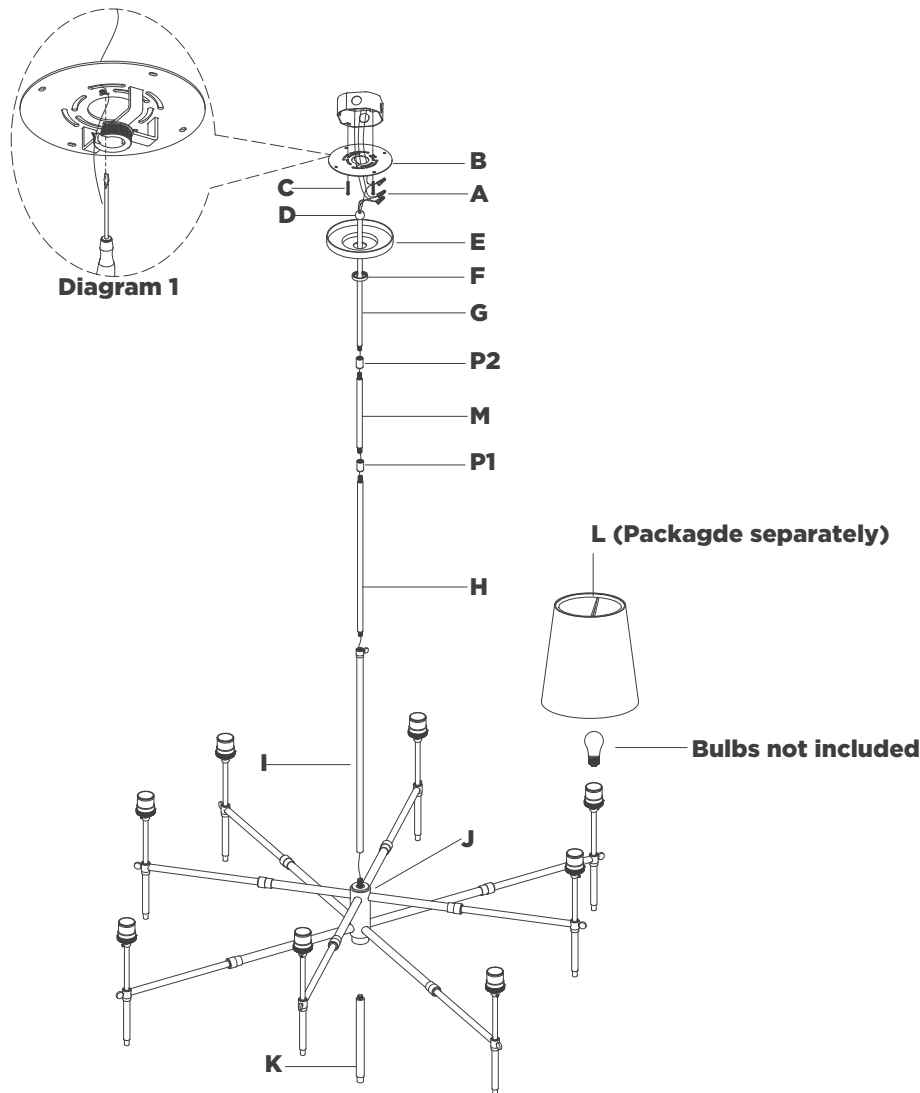

10. Wrap fixture ground wire (bare copper) around the green grounding screw (see diagram 1). Tighten. Continue fixture ground wire and connect to supply ground wire (usually green or bare copper) using wire nut **(A)**.

NOTE: It is imperative that the fixture is grounded.

11. Connect fixture neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
12. Connect fixture hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.

CAUTION: Do not reverse the hot and neutral connections.

13. Make sure all wire connections are tight, then carefully tuck into the junction box.
 14. Install canopy **(E)** to mounting plate **(B)** and secure with collar ring **(F)**.
 15. Thread finial **(K)** to the bottom of fixture body **(J)**.
 16. Install light bulbs into the sockets.
 17. Clip shades **(L)** onto light bulbs.
- NOTE:** If shade has additional packaging, carefully cut from interior of shade to avoid damage.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.