


## ASSEMBLY INSTRUCTIONS

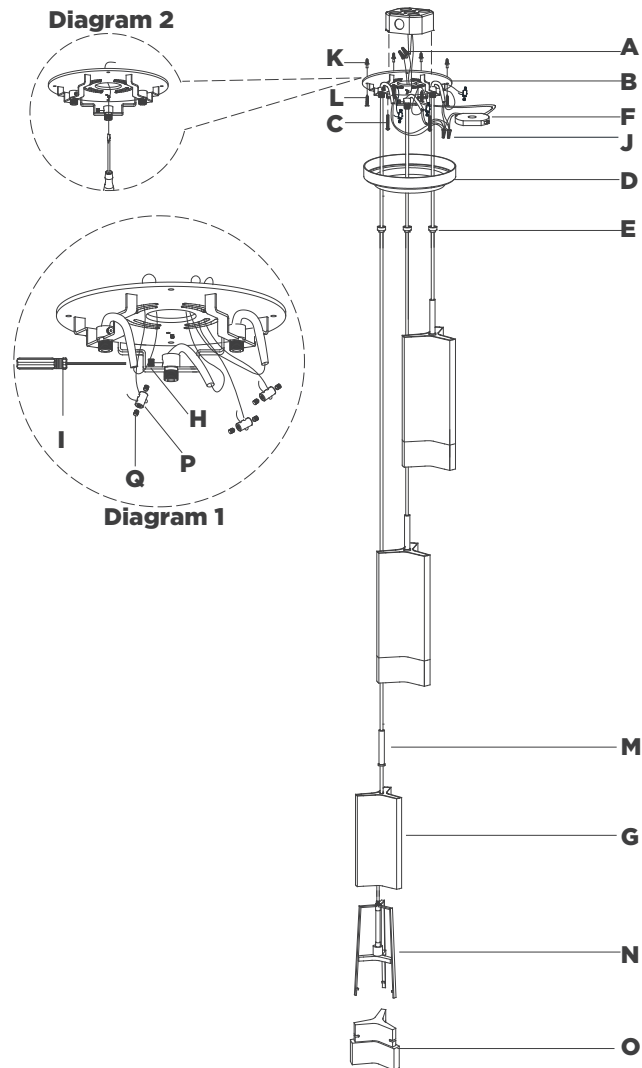

### Matcha 3 Light Pendant

Item # TOB5662

#### NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

#### TOOLS REQUIRED (NOT INCLUDED):

|                      |                     |                |
|----------------------|---------------------|----------------|
| Phillips Screwdriver | Slotted Screwdriver | Wire Strippers |
| Wire Cutters         | Measuring Tape      | Hammer         |
| Pencil               | Drill               |                |

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (D) from mounting plate (B) by removing collar rings (E).
3. Using mounting plate (B) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (K) into the holes using a hammer.
5. Install mounting plate (B) to the junction box and secure with mounting screws (C), then secure wood screws (L) to anchors (K).
6. Gently set fixture on a flat, non-abrasive surface to assemble and adjust fixture hanging wires.
7. Remove shade brackets (N) from shades (G) by removing tubes (M).
8. Carefully insert shades (O) to brackets (N), then assemble to shades (G) and secure with tubes (M).
9. Feed hanging cables through collar rings (E) and canopy (D).

## ASSEMBLY INSTRUCTIONS

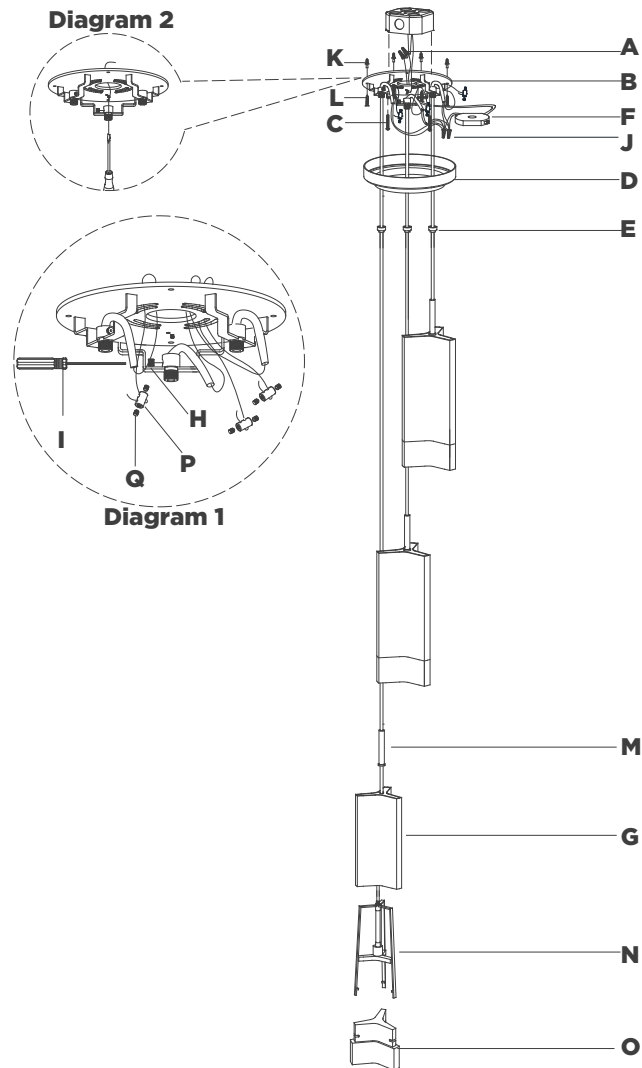

## Matcha 3 Light Pendant

Item # TOB5662

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Remove outer housing of wire by making a neat cut all the way around, about 6 mm from the end. Once cut is made, remove and discard the piece of housing, exposing the electrical wires.

**NOTE:** Make sure not to cut too deep into housing or electrical wires could become damaged.

11. Run support cables through hole on back of mounting plate (B). Loosen cable locks (P) and install to end of support cables. Insert other end of cable through the cable locks (P) and tighten ends (Q) with a screwdriver to secure (see diagram 1).

12. Separate wires and strip insulation on each 5/8".

13. Connect driver (F) output neutral wire (black) to the fixture neutral wire (marked "-") using wire nut (J).

14. Connect driver (F) output hot wire (red) to the fixture hot wire (marked "+") using wire nut (J).

**CAUTION:** Do not reverse the hot and neutral connections.

15. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.


**NOTE:** It is imperative that the fixture is grounded.

16. Connect driver (F) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).

17. Connect driver (F) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).

**CAUTION:** Do not reverse the hot and neutral connections.

## ASSEMBLY INSTRUCTIONS

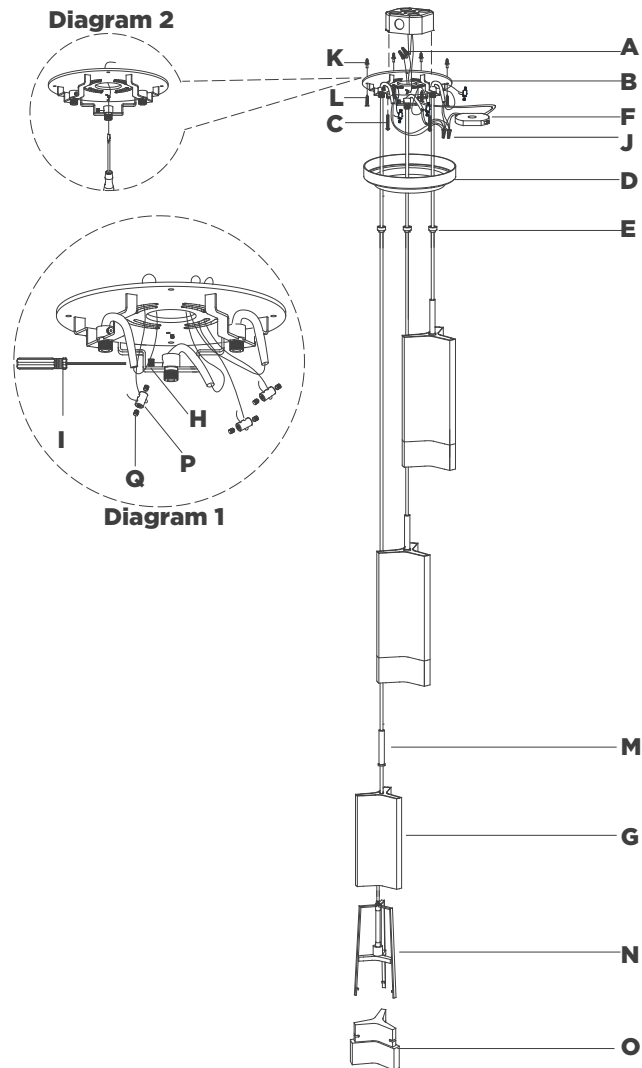

### Matcha 3 Light Pendant

Item # TOB5662

#### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

18. Make sure all wire connections are tight, then carefully tuck into the junction box.
19. Insert driver **(F)** into the middle of mounting plate **(B)** bracket.
20. Install canopy **(D)** to mounting plate **(B)** and secure with collar rings **(E)**.

**CARE INSTRUCTIONS:** Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.