

# Innovator® Cable



 **ADA**  
Optional  
ADA handle.



**970-CA**  
**980-CA**  
**990-CA**

Optional  
Theft-Resistant  
Device  
**NO CHARGE**



**Overflow  
Test Cap  
Included**



Standard flexible  
stopper prevents  
stubbing of toe or  
breakage of stopper  
stem.



Repairs can easily be made from inside  
tub by simply removing three screws and  
replacing old cable.

## **970-CA Innovator® Cable** **971-CA Half Kit**

**For most tubs up to 16" deep; 21" cable**

## **980-CA Innovator® Cable** **981-CA Half Kit**

**For most tubs up to 24" deep; 34" cable**

## **990-CA Innovator® Cable** **991-CA Half Kit**

**For most tubs up to 36" deep; 48" cable**

### **SPECIFICATIONS**

#### **FEATURES:**

- Fully repairable from inside the tub.
- Fully-testable cable bath waste; test plug included
- Installs in minutes, like the Innovator®.
- ADA Handle and theft-resistant device options available.
- Self-centering; self-aligning.
- Positive mechanical stop stays open in deep water.
- Flexible stopper; no stubbed toes.

#### **APPROVALS:**

- Manufactured in compliance with ASME A112.18.2-2005/ CSA B125.2-05.
- IAPMO approved
- CSA approved

#### **PATENTS :**


- <https://www.watcomfg.com/patents>

#### **THREAD SIZE:**

- 1½" – 11½ NPSM (Coarse Thread)
- 1.865" Major Diameter (outside thread diameter)
- 11.5 threads per inch

#### **PIPING/FITTINGS:**

- 970/980/990 and 971/981/991 available in ABS and PVC

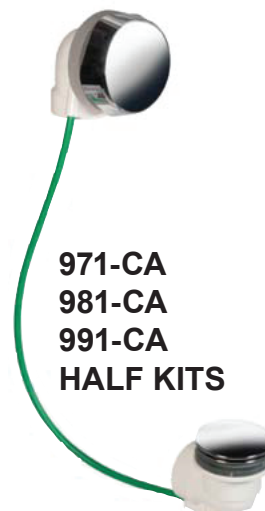

**971-CA**  
**981-CA**  
**991-CA**  
**HALF KITS**




For More Information Contact:  
**WATCO Manufacturing Company**  
1220 South Powell Road  
Independence, MO 64057-2724  
Ph. 816-796-3900 • FAX 816-796-0875

Always a step ahead [www.watcomfg.com](http://www.watcomfg.com)

# Innovator® Testable Cable

## 970/980/990-CA

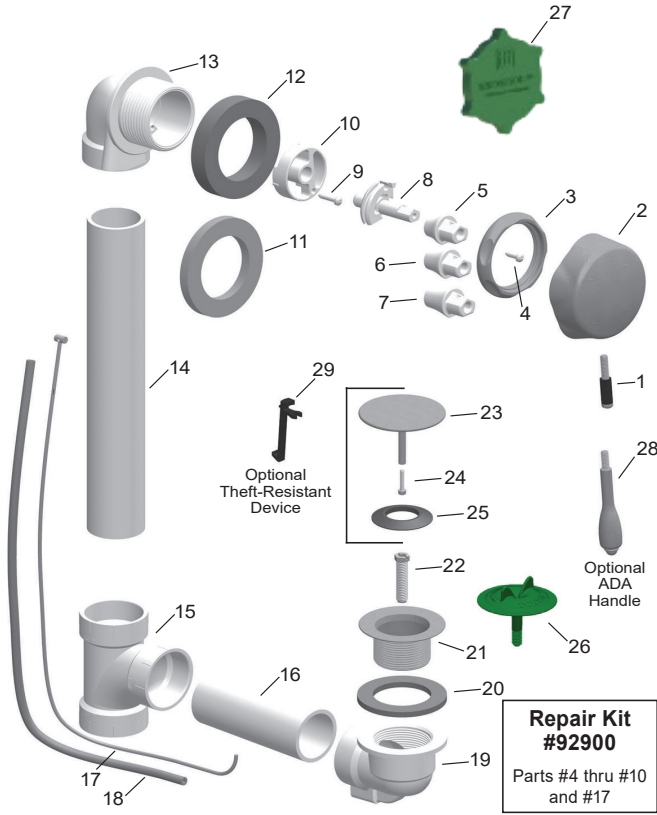

## Innovator® Cable Half Kits: 971/981/991-CA

Parts #1 thru #13 and #17 thru #27

Tube Closure:	Cable Stopper
AP - Aged Pewter	•
BB - Brushed Bronze	•
BN - Brushed Nickel	•
BS - Biscuit	•
BZ - Oil-Rubbed Bronze	•
CB - Chrome Brushed	•
CP - Chrome Plated	•
NP - Nickel Polished	•
PB - Polished Brass	•
WH - White	•
WI - Wrought Iron (Matte Black)	•

Item	Part #	Description
1	01032__*	Cable Faceplate Screw, 1/4-20x1-3/4 with Screw Guide
2	01019__*	Cable Faceplate
3	01047__*	Cable Overflow Elbow Retainer Nut
4	01037	Cable Adapter-to-Drive Shaft Screw, #8x5/8
5	01071	Cable Faceplate Adapter - Thin
6	01072	Cable Faceplate Adapter - Medium
7	01073	Cable Faceplate Adapter - Thick
8	20145	Cable Drive Shaft
9	01036	Cable Retainer-to-Overflow Elbow Screw #8x7/8
10	20146	Cable Retainer
11	10694	Overflow Elbow Gasket Half Height
12	10675	Overflow Elbow Gasket
13	11029	1-1/2" Schedule 40 Cable OF Elbow, ABS
	14029	1-1/2" Schedule 40 Cable OF Elbow, PVC
14	SCHABS-11.75	970: Schedule 40 Pipe, ABS, 1.5" x 11.75"
	SCHPVC-11.75	970: Schedule 40 Pipe, PVC, 1.5" x 11.75"
	SCHABS-20.25	980: Schedule 40 Pipe, ABS, 1.5" x 20.25"
	SCHPVC-20.25	980: Schedule 40 Pipe, PVC, 1.5" x 20.25"
	SCHABS-32.00	990: Schedule 40 Pipe, ABS, 1.5" x 32.00"
	SCHPVC-32.00	990: Schedule 40 Pipe, PVC, 1.5" x 32.00"
15	14011	1-1/2" Schedule 40 Sanitary Tee, ABS
	14010	1-1/2" Schedule 40 Sanitary Tee, PVC
16	SCHABS-4.625	970: Schedule 40 Pipe, ABS, 1.5" x 4.625"
	SCHPVC-4.625	970: Schedule 40 Pipe, PVC, 1.5" x 4.625"
	SCHABS-11.75	980: Schedule 40 Pipe, ABS, 1.5" x 11.75"
	SCHPVC-11.75	980: Schedule 40 Pipe, PVC, 1.5" x 11.75"
	SCHABS-11.75	990: Schedule 40 Pipe, ABS, 1.5" x 11.75"
	SCHPVC-11.75	990: Schedule 40 Pipe, PVC, 1.5" x 11.75"
17	20151	Cable Core
18	20161	Cable Conduit
19	11016	1-1/2" Schedule 40 Cable Drain Elbow, ABS
	14016	1-1/2" Schedule 40 Cable Drain Elbow, PVC
20	10696	Drain Elbow Gasket
21	01016__*	Strainer Body, Brass, 1.865" - 11.5x1.25"
22	20147	Cable Core Guide
23	92867-__*	Cable Stopper Assembly – includes the following:
24	20069	Stopper Adjusting Screw
25	11507	Stopper Seal, 1-1/16"
26	11577	Test Plug with O-Ring-Type Gasket
27	11114	Test Cap
OPTIONAL:		
28	92874-__*	ADA Handle and Handle Set Screw
29	01076	Cable Theft-Resistant Device

\* Please indicate desired finish.