




Z1310

ECOLOtrol WALL HYDRANT
Exposed, Non-Freeze, Anti-Siphon, Automatic Draining

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

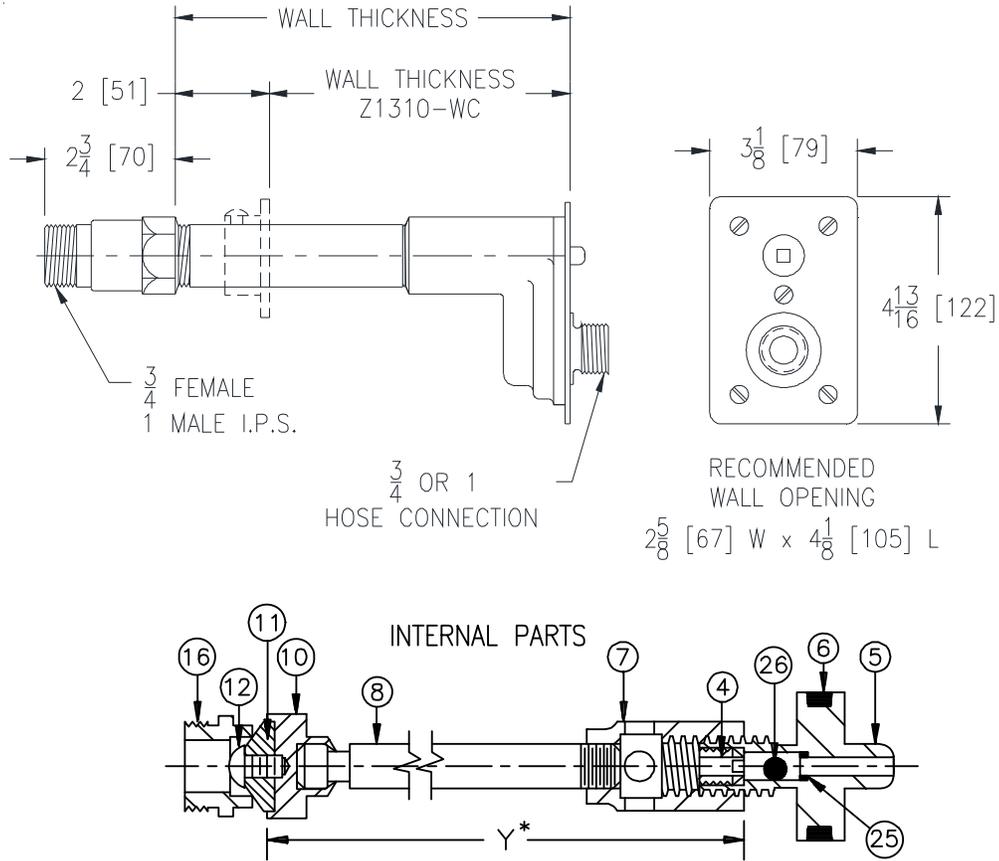

Wall Thickness Inches [mm]	Approx. Wt. Lbs. [kg]
4, 6, 8 [102, 152, 203]	5 [2]
10, 12, 14 [254, 305, 356]	8 [4]
16, 18 [406, 457]	11 [5]
20, 22, 24 [508, 559, 610]	14 [6]

ENGINEERING SPECIFICATION: ZURNZ1310

Exposed Ecolotrol "anti-siphon" automatic draining wall hydrant. Complete with non-freeze integral backflow preventer, bronze casing, all bronze interior parts, non-turning operating rod with free-floating compression closure valve, replaceable bronze seat and seat washer, and combination 3/4" female or 1" male straight IP inlet. Stainless steel face with operating key.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ____ -PB Polished Bronze Face
- ____ -RA4 24 [610] Replacement Rod Assembly with Repair Kit (-RK)
- ____ -RK Hydrant Parts Repair Kit
- ____ -WC Wall Clamp
- ____ -34FS 3/4 [19] Solder Female Inlet Adapter
- ____ -34UN 3/4 [19] IP 90° Inlet Elbow w/Union Nut

PARTS LIST

Item	Name	Quan.
6	O-Ring	1
4	Screw	1
5	Operating Screw	1
7	Operating Coupling	1
8	Operating Rod	1
10	Washer Guide	1
11	Washer (neoprene)	1
12	Screw	1
16	Removable Seat	1
25	O-Ring	1
26	Ball	1

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | Zurn Industries Limited
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. G
Date: 09/27/2017
C.N. No. 138007
Prod. | Dwg. No. Z1310