




# Z460B

## SHALLOW BODY FLOOR DRAIN W/ SIDE OUTLET AND "TYPE B" STRAINER

SPECIFICATION SHEET

TAG \_\_\_\_\_

Dimensional Data (inches and [ mm ]) are Subject to Manufacturing Tolerances and Change Without Notice

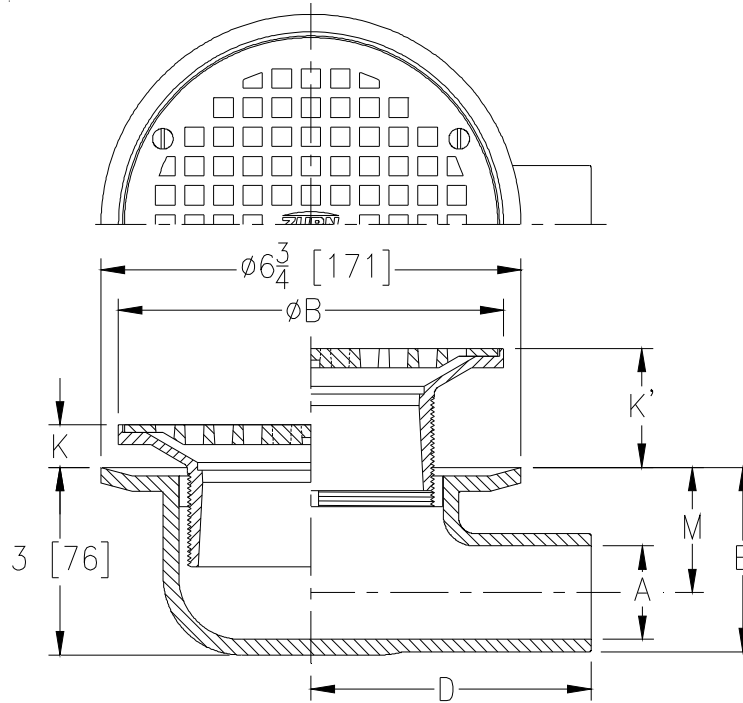

Dimensions In Inches [mm]					Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm <sup>2</sup> ]
A Pipe Size	B Strainer Dia.	K Min.	K' Max.	M		
1-1/2 [38]	5 [127]	15/32 [12]	1-5/8 [41]	2 [51]	8 [4]	8 [52]
2 [51]	5 [127]	15/32 [12]	1-5/8 [41]	1-25/32 [45]	8 [4]	8 [52]
1-1/2 [38]	6 [152]	11/16 [17]	1-29/32 [48]	2 [51]	9 [4]	9 [58]
2 [51]	6 [152]	11/16 [17]	1-29/32 [48]	1-25/32 [45]	9 [4]	9 [58]
1-1/2 [38]	7 [178]	1 [25]	2-1/4 [57]	2 [51]	10 [5]	12 [77]
2 [51]	7 [178]	1 [25]	2-1/4 [57]	1-25/32 [45]	10 [5]	12 [77]

**ENGINEERING SPECIFICATION:** ZURN ZN460B  
Shallow body floor and shower drain, Dura-Coated cast iron body with side outlet, seepage slots, and integral threaded connection for "TYPE B" polished nickel bronze light-duty strainer.

**OPTIONS** (Check/specify appropriate options)

**PIPE SIZE**

- 1-1/2 [38]
- 2 [51]
- 1-1/2 [38]
- 2 [51]

(Specify size/type) **OUTLET**

- \_\_\_ IP Threaded
- \_\_\_ IP Threaded
- \_\_\_ NH No-Hub
- \_\_\_ NH No-Hub

**'D' DIM.**

- 3-1/4 [83]
- 3-1/4 [83]
- 4-1/4 [114]
- 5 [127]

**'E' BODY HT. DIM.**

- 3-5/32 [80]
- 3-7/32 [82]
- 2-31/32 [75]
- 2-31/32 [75]

**PREFIXES**

- \_\_\_ ZB D.C.C.I. Body Assembly w/ Polished Bronze Top
- \_\_\_ ZN D.C.C.I. Body Assembly w/ Polished Nickel Bronze Top\*

**SUFFIXES**

- \_\_\_ -C Clamp Collar
- \_\_\_ -CP Chrome-Plated Bronze Top
- \_\_\_ -G Galvanized Cast Iron
- \_\_\_ -PC Protective Cover
- \_\_\_ -VP Vandal-Proof Secured Top
- \_\_\_ -Y Sediment Bucket

\* Regularly furnished unless otherwise specified.